

(12) **UK Patent Application** (19) **GB** (11) **2 193 816** (13) **A**

(43) Application published 17 Feb 1988

(21) Application No **8617050**

(22) Date of filing **12 Jul 1986**

(71) Applicant  
**Robert Frederick Oxley,**  
**89a Route de Florissant, 1206 Geneva, Switzerland**

(72) Inventor  
**Robert Frederick Oxley**

(74) Agent and/or Address for Service  
**W. P. Thompson & Co.,**  
**Coopers Building, Church Street, Liverpool L1 3AB**

(51) INT CL<sup>4</sup>  
**G02B 6/00**

(52) Domestic classification (Edition J):  
**G2J GX**

(56) Documents cited  
**None**

(58) Field of search  
**G2J**  
**Selected US specifications from IPC sub-class G02B**

(54) **Optical switching system**

(57) An optical routing device comprising a housing block (10) containing a plurality of intersecting holes or other light guides (20), and at least one control rod (18) which can be selectively introduced into any of said light guides (20) so that a light reflection means, such as a mirror, carried by that rod (18) is brought into a position lying at the intersection of two said light guides (20a, 20b) whereby a light beam travelling in light guides (20a) is re-directed into light guides (20b).

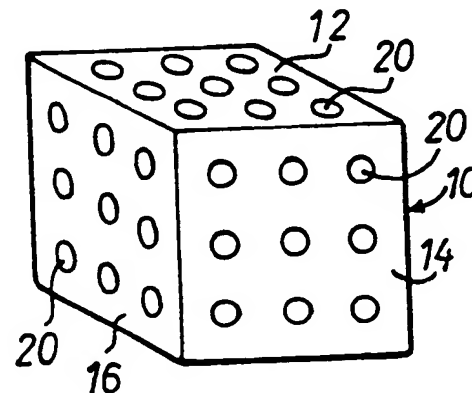


Fig 1.

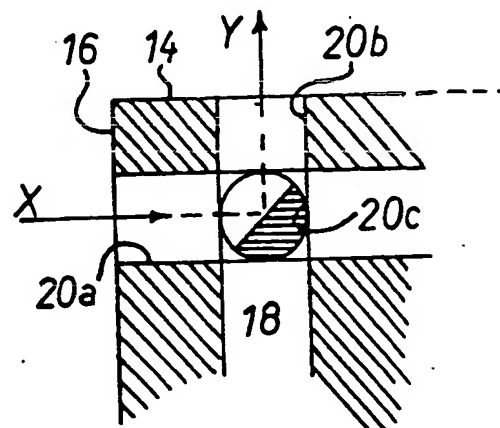


Fig 3.

1/1

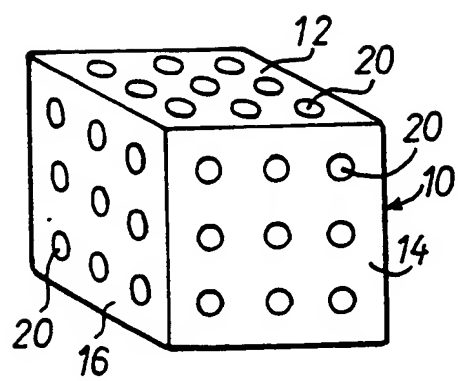


Fig 1.

22  Fig 2b.

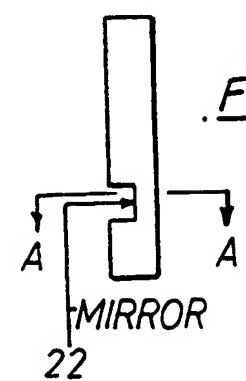


Fig 2a.

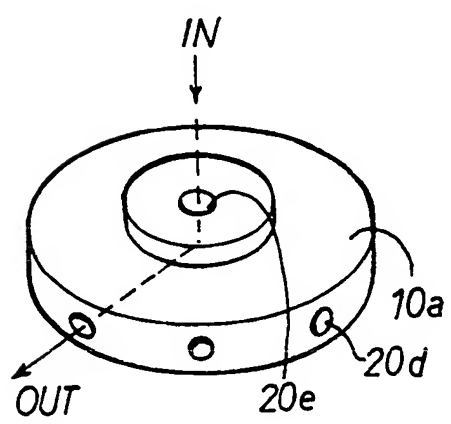


Fig 6.

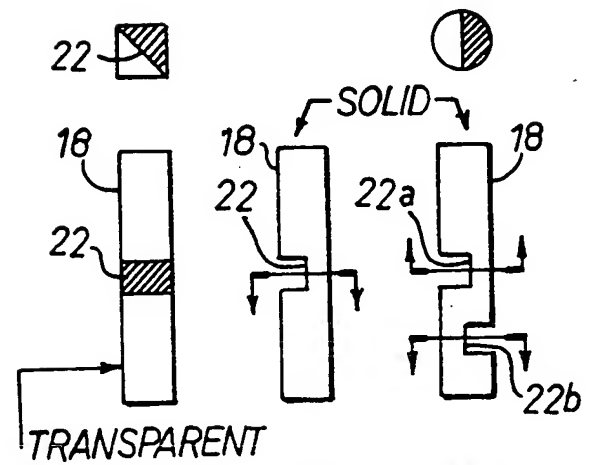


Fig 4a.

Fig 4b.

Fig 4c.

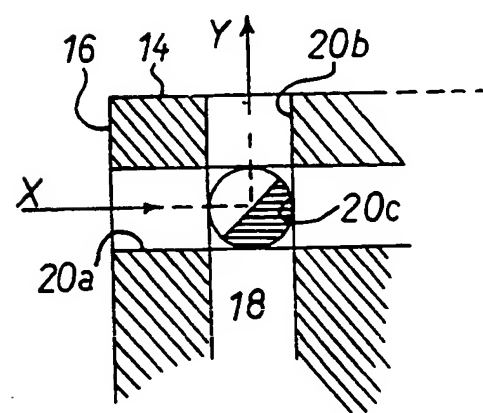


Fig 3.

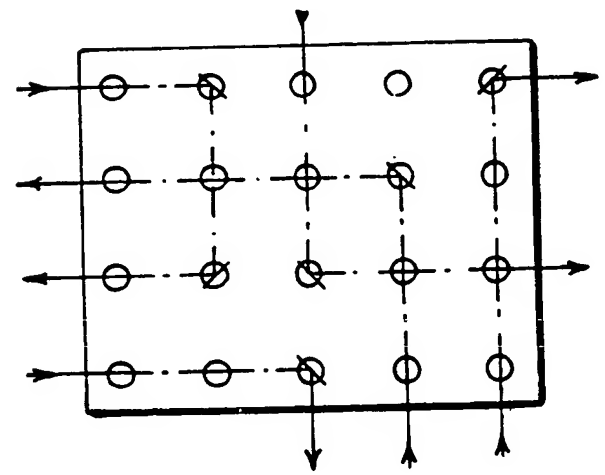


Fig 5.

## SPECIFICATION

### Optical switching system

5 The present invention is concerned with a system for enabling programmed switching of optical signals.

10 An object of the present invention is to provide a means of preselecting optical switching paths for the programmed routing of optical signals.

According to a first aspect of the present invention, there is provided an optical routing device comprising a housing block containing a plurality of intersecting light guides, and at least one control rod which can be selectively introduced into any of said light guides so that a light reflection means carried by that rod is brought into a position lying at the intersection of two said light guides, whereby a light beam travelling in one of said intersecting light guides is redirected into another of said intersecting light guides.

25 According to a second aspect of the present invention, there is provided an optical routing device comprising a housing block (which may be opaque or transparent with a controlled refractive index) containing a plurality of intersecting holes, and at least one control rod which can be selectively introduced into any of said holes so that a mirror carried by that rod is brought into a position lying at the intersection of two said holes, whereby a light beam travelling in one of said intersecting holes is redirected into another of said intersecting holes.

35 The intersecting holes can lie in any number of planes within the block and can face in any number of directions. Any number of control rods can be used, depending on the complexity of the routing to be achieved.

40 The control rods can carry several mirrors at different axial positions along the rods for controlling light beams in different pairs of intersecting holes at different planes within the block. The control rods may also carry other means for controlling the light beams, such as prisms or partially reflecting surfaces which may or may not be covered with a coating so constituted as to reflect fully or in part particular frequencies or band of frequencies, in the visual spectrum, the latter partially reflecting surfaces allowing the light signal to be transmitted in part to another mirror or mirrors (or other means of reflection), thus effectively allowing one signal to be divided and redirected to several outputs.

50 Since non-coherent or out of phase intersecting light beams can cross one another without interference, a three-dimensional switching arrangement is thus possible which leads to the possibility of the complex control of a large number of light signals within a

after, by way of example, with reference to the accompanying drawings, in which:

Fig.1 is a diagrammatic perspective view of the body part of one embodiment of an optical routing device in accordance with the present invention;

Fig.2a shows diagrammatically one possible control rod for use with the embodiment of Fig.1;

Fig.2b is a section on A-A in Fig.2a;

Fig.3 is a diagrammatic sectional view illustrating the operation of the first embodiment;

Figs. 4(a), (b) and (c) show further examples of control rods;

Fig.5 diagrammatically illustrates a number of possible routing paths in a single plane embodiment; and

Fig.6 is a diagrammatic perspective view of the body part of a second embodiment of an optical routing device in accordance with the present invention.

Referring first to Fig.1, the embodiment comprises a solid Parallelapiped 10, in this case a cube, which is pierced on its three adjacent faces 12, 14, 16 by respective similar arrays of (in this case) nine through-holes 18. Because of the symmetrical nature and positioning of these holes 18, it will be noted that each hole in a given one of the faces 12, 14, 16 intersects three of the holes in each of the other two faces 12, 14, 16.

A plurality of solid or tubular rods 18 (Fig.2) are provided, which can be inserted into selected holes 20 in the block 10. Each rod 18 contains one or more cut-away mirrored portions 22 (in this case it has only one such portion) for intercepting a light beam and deflecting it through 90°. This operation is illustrated in Fig.3 which shows a hole 20a leading from the face 16 intersecting holes 20b and 20c leading from the faces 14 and 18 of the cube 10, respectively. The rod 18 is inserted axially into the hole 20c and is angularly orientated with the hole 20c such that its mirror lies at 45° to the longitudinal axis of both the holes 20a and 20b. Thus, if a light beam X is then directed axially into the hole 20a it will be deflected through 90° so that it leaves axially along the hole 20b (as indicated at Y). Naturally, the same operation is obtained in reverse by directing the signal into the hole 20b whereby the light signal then leaves by the hole 20a. It will be appreciated that by turning the rod 18 through 90° (anti-clockwise in Fig.3), the light beam entering via the hole 20a could alternatively have been directed in the opposite direction down the hole 20b, possibly to be intercepted by mirrors in rods 18 at other positions or simply so as to leave the block from the other end of hole 20b.

The rods 18 can themselves be transparent or opaque or may consist of a framework to the light unobstructed passage, and are

Guides may be provided on the rods and/or the block for ensuring accurate alignment of the mirrors with the holes at selected positions.

- 5 Each rod 18 can carry one or a plurality of mirrors 22, the mirrors being orientated in the same or different directions, including up and down (i.e. directing incident light axially along the rod for at least part of its length). The  
10 rods 18 need not be of circular section, and could, for example, be of square or rectangular section (see Fig.4a). In the latter cases, if the rod is transparent and the mirror is at 45°, it will be noted that the sides of the rod will  
15 present no obstacle to the light transmission in planes above and below the mirror since they will light perpendicular to incident light beams.

Fig.4b shows an example of a solid rod 18  
20 of circular section having a single mirror 22. Fig.4c shows an example of a solid rod 18 of circular section having two mirrors 22a, 22b facing in opposite directions.

- Fig.5 shows examples (using just a single  
25 switching plane for ease of illustration) of switching capability using the present system. Light beams introduced into the holes in any one of the faces can be routed by the mirrors on the rods 18 so as to leave either by that  
30 same face, or any of the other faces. Naturally, by increasing the number of planes, the possible variations for switching increases enormously. This results in one of the principal advantages of the present system, namely  
35 that a substantial number of potential routing paths can be available in a relatively small space.

The shape of the block 10 is not limited to a parallelepiped and can be of any suitable  
40 configuration, having any number of ports in any of three directions and any number of planes. For example, as shown in Fig.6, the block can be in the form of a disc 10a having a plurality of radial holes 20d which intersect  
45 a central axial hole 20e.

- A rod can be inserted into any one of the radial holes 20d containing a mirror 22 which is arranged to lie at the intersection of that hole 20d with the central hole 20e so that  
50 light directed into the central hole 20e is redirected by the mirror so as to leave by a selected one of the other radial holes 20d. Alternatively, the hole 20e could receive a rod 18 (not shown) which is transparent and carries a mirror adapted to reflect light (directed  
55 axially into the rod) through 90° so as to redirect the light out of any selected hole 20d, depending on the selected angular orientation of the rod 18 in the hole 20e.

60 Although not discussed herein in detail, means may be necessary for filtering, collimating and otherwise processing the light beams

tering and/or leaving the system might be carried in optical fibres and inserted into and led from the block by means of flying optical plug leads.

70

## CLAIMS

1. An optical routing device comprising a housing block containing a plurality of intersecting light guides, and at least one control  
75 rod which can be selectively introduced into any of said light guides so that a light reflection means carried by that rod is brought into a position lying at the intersection of two said light guides, whereby a light beam travelling in  
80 one of said intersecting light guides is redirected into another of said intersecting light guides.

2. A device as claimed in claim 1, wherein the light reflection means is a mirror.

- 85 3. A device as claimed in claim 1, wherein the light reflection means is a prism.

4. A device as claimed in claim 1, wherein the light reflection means is a partially reflecting surface enabling one light signal applied  
90 thereto to be divided and redirected to several outputs.

5. A device as claimed in any of claims 1 to 4 wherein the housing block is of generally cuboidal configuration.

- 95 6. A device as claimed in any of claims 1 to 4 wherein the housing block is of generally discoidal configuration.

7. A device as claimed in claim 5, wherein the intersecting light guides comprise holes  
100 extending between pairs of opposite faces of the cuboidal housing block.

8. A device as claimed in claim 6, wherein the intersecting light guides include a plurality of diametral or radial holes in the discoidal  
105 housing block.

9. A device as claimed in claim 8, including a further light guide comprising a hole extending axially of the discoidal housing block and intersecting said plurality of diametral or radial  
110 holes.

10. A device as claimed in any of claims 1 to 9 wherein at least part of the control rod is transparent to light.

- 115 11. A device as claimed in any of claims 1 to 9 wherein the control rod is opaque to light.

12. A device as claimed in claim 10, including two said light reflection means disposed at axially separated positions along the length  
120 of the control rod.

13. A device as claimed in claim 12, wherein two of said light reflection means are orientated so as to direct incident light, applied to one said light reflection means via a first light guide, axially along the control rod to the other light reflection means where it is retransmitted via a second light guide.

which can be selectively introduced into any of said holes so that a mirror carried by that rod is brought into a position lying at the intersection of two said holes, whereby a light beam travelling in one of said intersecting holes is redirected into another of said intersecting holes.

15. An optical routing device as claimed in claim 14 wherein the control rod includes two of said mirrors disposed at axially separated positions therealong whereby incident light in a first of said holes is transmitted axially along the rod between said two mirrors before being retransmitted via a second hole disposed in a different but parallel plane to said first hole.

16. An optical routing device as claimed in claim 14, wherein the housing block is opaque.

20 17. An optical routing device as claimed in claim 15, wherein the housing block is made of a material having a controlled refractive index.

25 18. An optical routing device substantially as hereinbefore described with reference to and as illustrated in the accompanying drawings.

